



3寸/4寸太阳能不锈钢叶轮潜水泵
3INCH / 4INCH CENTRIFUGAL SOLAR SUBMERSIBLE PUMP
(STAINLESS STEEL IMPELLER)

Free Parts 免费配件



Model Description 型号说明

3SSC6/60-D90/1000

- Pump Power 水泵功率
- Rated Voltage 额定电压
- Max. Head 最大扬程
- Max. Flow 最大流量
- Centrifugal Pump 离心泵
- Stainless Steel Impeller 不锈钢叶轮
- Submersible Pump 潜水泵
- 4inch Outline 水泵外径




Material of Parts 零件材质

- Outlet 出水口:304 Stainless Steel
- Pump Body 泵体:304 Stainless Steel
- Motor Body 机筒:304 Stainless Steel
- Bearing 轴承:NSK
- Impeller 叶轮:304 Stainless Steel
- Screw 螺丝:316 Stainless Steel
- Motor 电机:Full Oil Permanent Magnet Brushless DC Motor (Without Hall)
充油式永磁无刷直流电机 (无霍尔)
- Controller 控制器:32bit MCU / FOC / Sine Wave Current / MPPT
32位MUC / 矢量控制 / 正弦波电流 / 太阳能最大功率点跟踪

Curve

3INCH / 4INCH CENTRIFUGAL SOLAR SUBMERSIBLE PUMP
(STAINLESS STEEL IMPELLER)

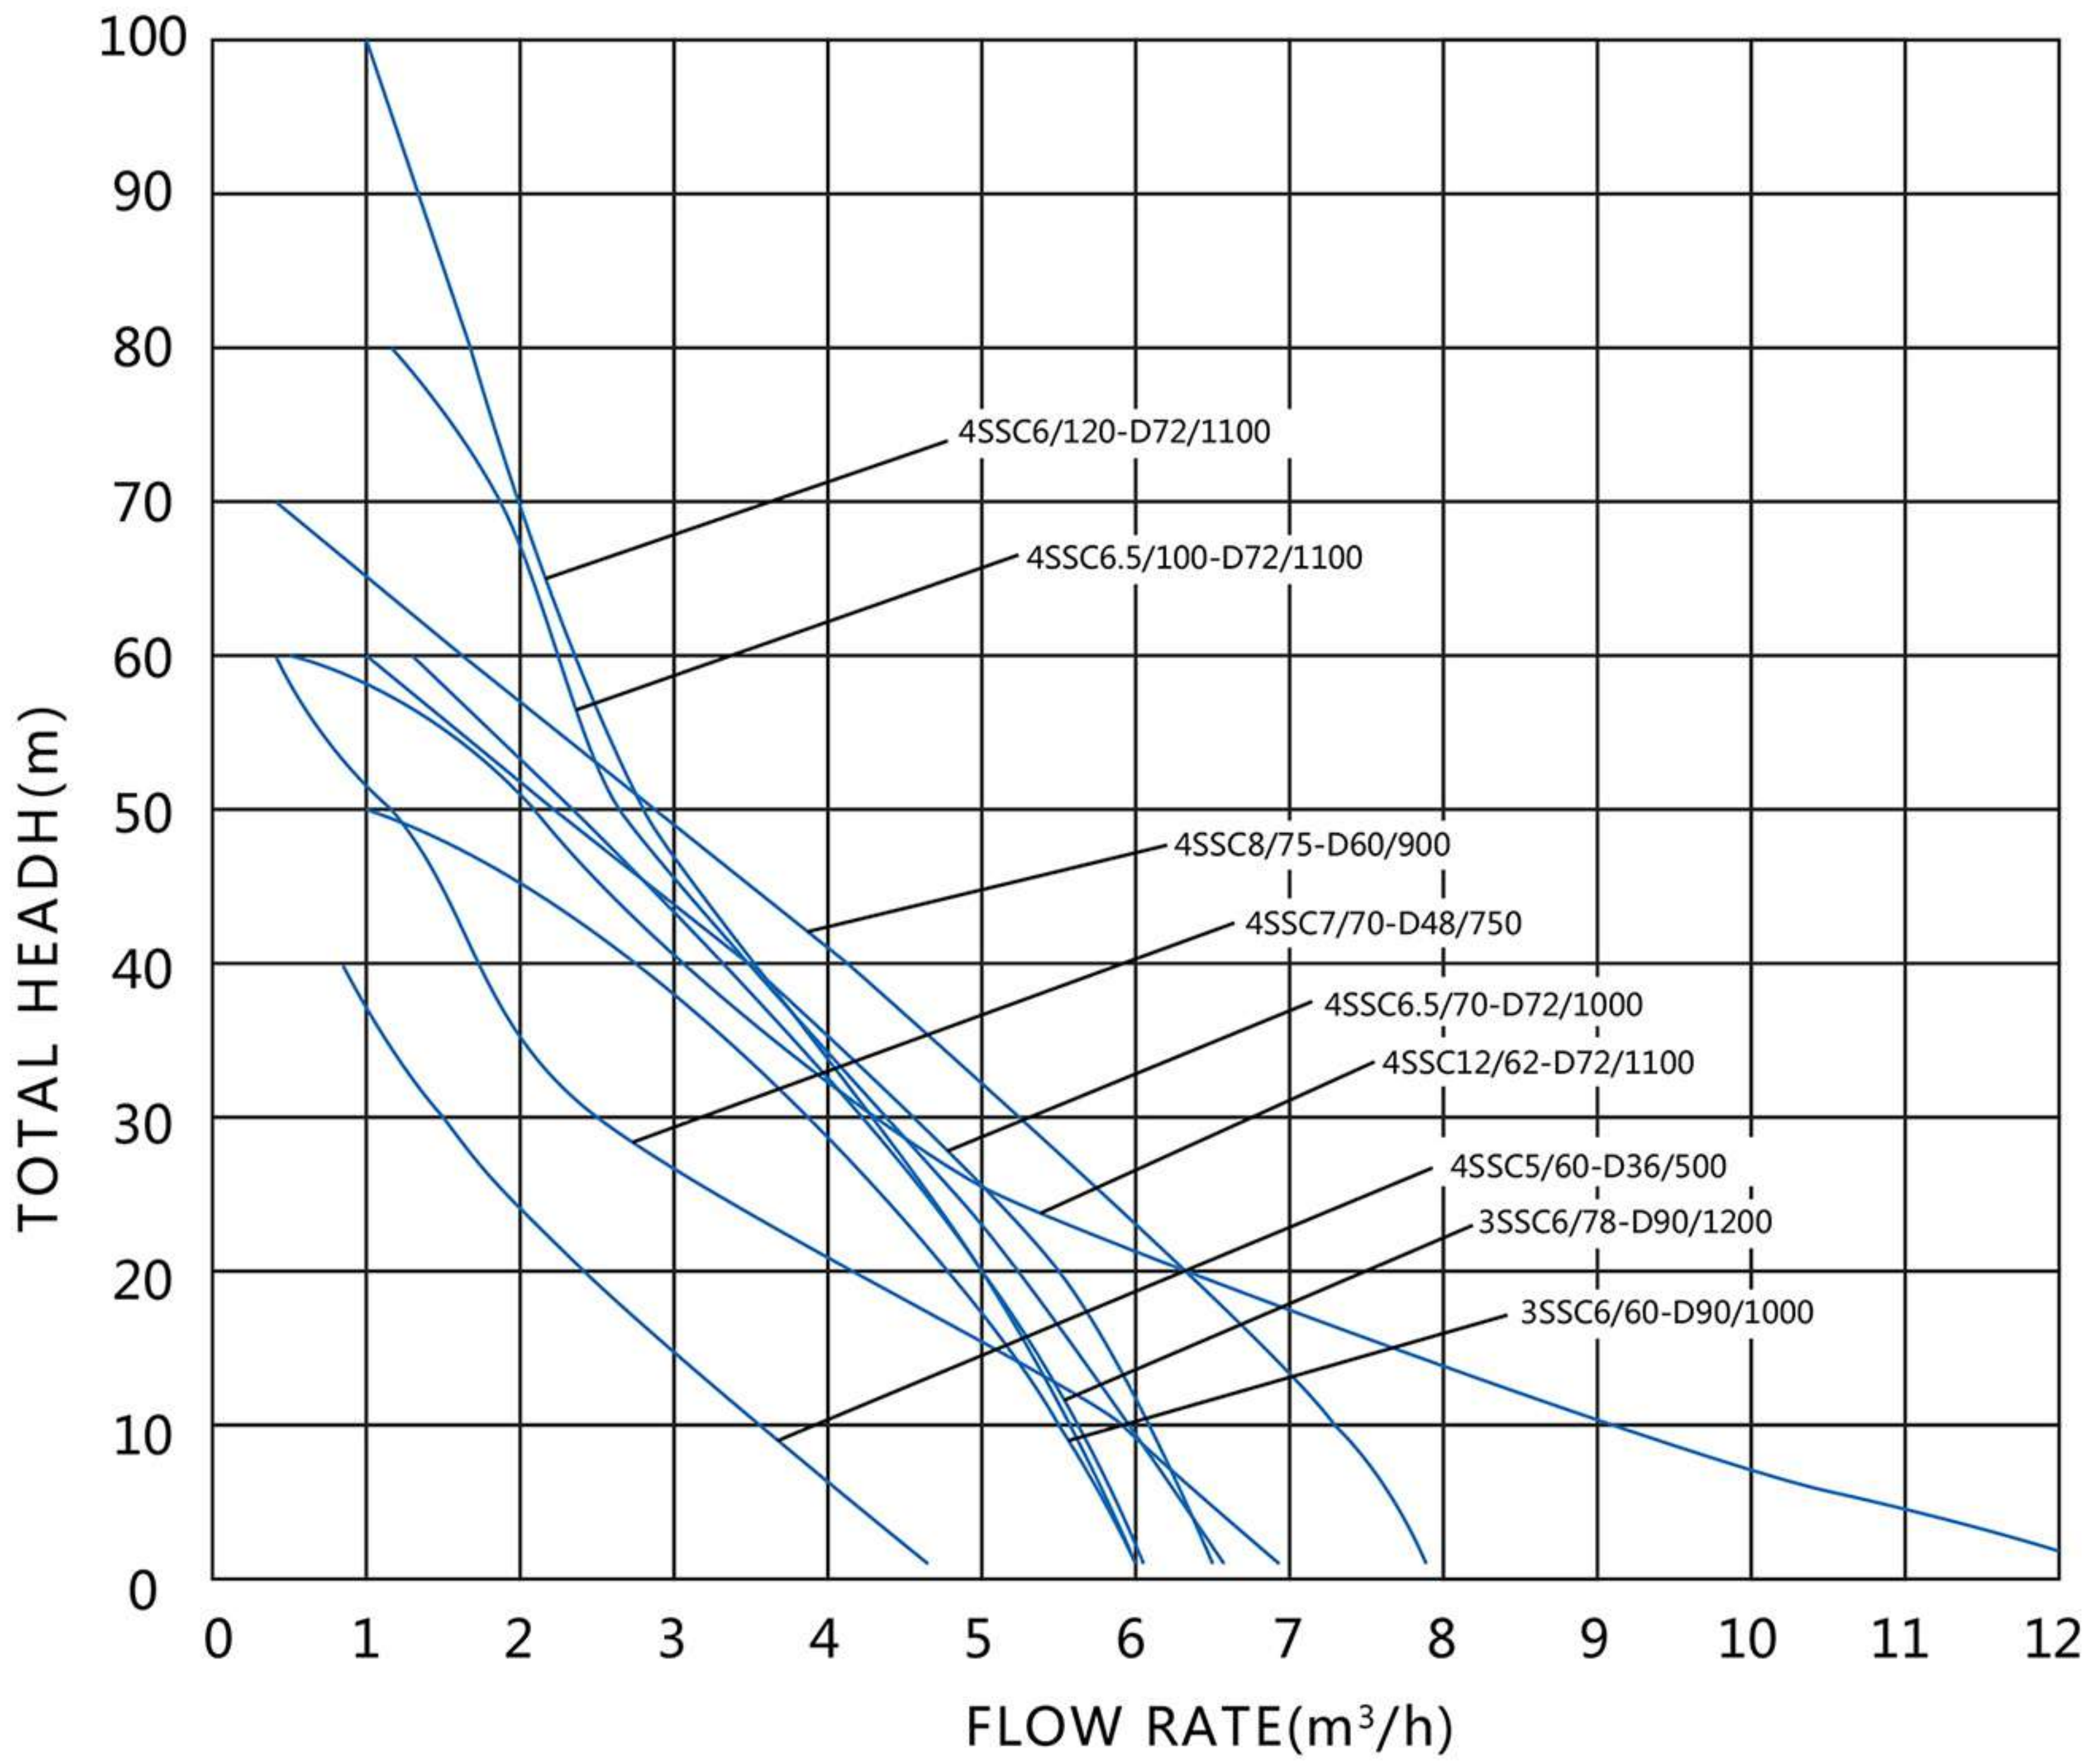

Performance Chart 流量扬程参数

MODEL 型号	HEAD 扬程 Mtrs.	1	5	10	20	25	30	35	40	50	60	70	80	100	120
3SSC6/60-D90/1000	FLOW 流量 m³/hr	5.96	5.78	5.49	4.79	4.37	3.81	3.12	2.43	1.02	0				
3SSC6/78-D90/1200		5.99		5.61	5.08		4.45		3.57	2.41	1.36		0		
4SSC5/60-D36/500		4.68	4.35	3.79	2.31	1.94	1.53	1.19	0.93		0				
4SSC12/62-D72/1100		12	10.4	9.43	6.31	5.06	3.99	3.26	2.67	2.1	0.49				
4SSC6.5/70-D72/1000		6.52	6.4	6.28	5.59	5.13	4.67	4.17	3.47	2.28	1.09	0			
4SSC7/70-D48/750		6.88	6.58	5.9	3.84	3.25	2.43	2.08	1.64	1.07	0.41	0			
4SSC16/70-D110/1500		16		14.2	10.2	8.99	7.37	6.26	5.65	4.9	2.26	0			
4SSC8/75-D60/900		7.85	7.91	7.33	5.88	5.06	4.13	3.44	2.99	2.46	1.58	0.43			
4SSC6.5/100-D72/1100		6.51	6.38	6.1	5.31	4.88	4.42	3.79	3.26	2.61	2.2	1.9	1.21	0	
4SSC6/120-D72/1100		6		5.6	5		4.3		3.4	2.7	2.18	1.75	1.44	1	0

Technical Details 水泵技术参数

MODEL 型号	POWER 功率	Voltage 电压	Voltage Range 电压范围	Max Flow 最大流量	Max Head 最大扬程	Outlet 出水口	Outline 外径
3SSC6/60-D90/1000	1000 W	1.3 HP	90 VDC	30~132 VDC	6 m³/hr	60 Mtrs.	1 inch 3 inch
3SSC6/78-D90/1200	1200 W	1.6 HP	90 VDC	30~132 VDC	6 m³/hr	78 Mtrs.	1 inch 3 inch
4SSC5/60-D36/500	500 W	0.7 HP	36 VDC	20~68 VDC	5 m³/hr	60 Mtrs.	1.25 inch 4 inch
4SSC12/62-D72/1100	1100 W	1.5 HP	72 VDC	30~100 VDC	12 m³/hr	62 Mtrs.	2 inch 4 inch
4SSC6.5/70-D72/1000	1000 W	1.3 HP	72 VDC	30~100 VDC	6.5 m³/hr	70 Mtrs.	1.25 inch 4 inch
4SSC7/70-D48/750	750 W	1.0 HP	48 VDC	30~80 VDC	7 m³/hr	70 Mtrs.	1.5 inch 4 inch
4SSC16/70-D110/1500	1500 W	2.0 HP	110 VDC	30~140 VDC	16 m³/hr	70 Mtrs.	2 inch 4 inch
4SSC8/75-D60/900	900 W	1.2 HP	60 VDC	30~80 VDC	8 m³/hr	75 Mtrs.	1.5 inch 4 inch
4SSC6.5/100-D72/1100	1100 W	1.5 HP	72 VDC	30~100 VDC	6.5 m³/hr	100 Mtrs.	1.25 inch 4 inch
4SSC6/120-D72/1100	1100 W	1.5 HP	72 VDC	30~100 VDC	6 m³/hr	120 Mtrs.	1.25 inch 4 inch

4寸太阳能不锈钢叶轮潜水泵
4INCH CENTRIFUGAL SOLAR SUBMERSIBLE PUMP
(STAINLESS STEEL IMPELLER)

Free Parts 免费配件



Model Description 型号说明

4SSC8/125-D72/1200

- Pump Power 水泵功率
- Rated Voltage 额定电压
- Max. Head 最大扬程
- Max. Flow 最大流量
- Centrifugal Pump 离心泵
- Stainless Steel Impeller 不锈钢叶轮
- Submersible Pump 潜水泵
- 4inch Outline 水泵外径




Material of Parts 零件材质

- Outlet 出水口:304 Stainless Steel
- Pump Body 泵体:304 Stainless Steel
- Motor Body 机筒:304 Stainless Steel
- Bearing 轴承:NSK
- Impeller 叶轮:304 Stainless Steel
- Screw 螺丝:316 Stainless Steel
- Motor 电机:Full Oil Permanent Magnet Brushless DC Motor (Without Hall)
充油式永磁无刷直流电机 (无霍尔)
- Controller 控制器:32bit MCU / FOC / Sine Wave Current / MPPT
32位MUC / 矢量控制 / 正弦波电流 / 太阳能最大功率点跟踪

4INCH CENTRIFUGAL SOLAR SUBMERSIBLE PUMP
(STAINLESS STEEL IMPELLER)

Curve

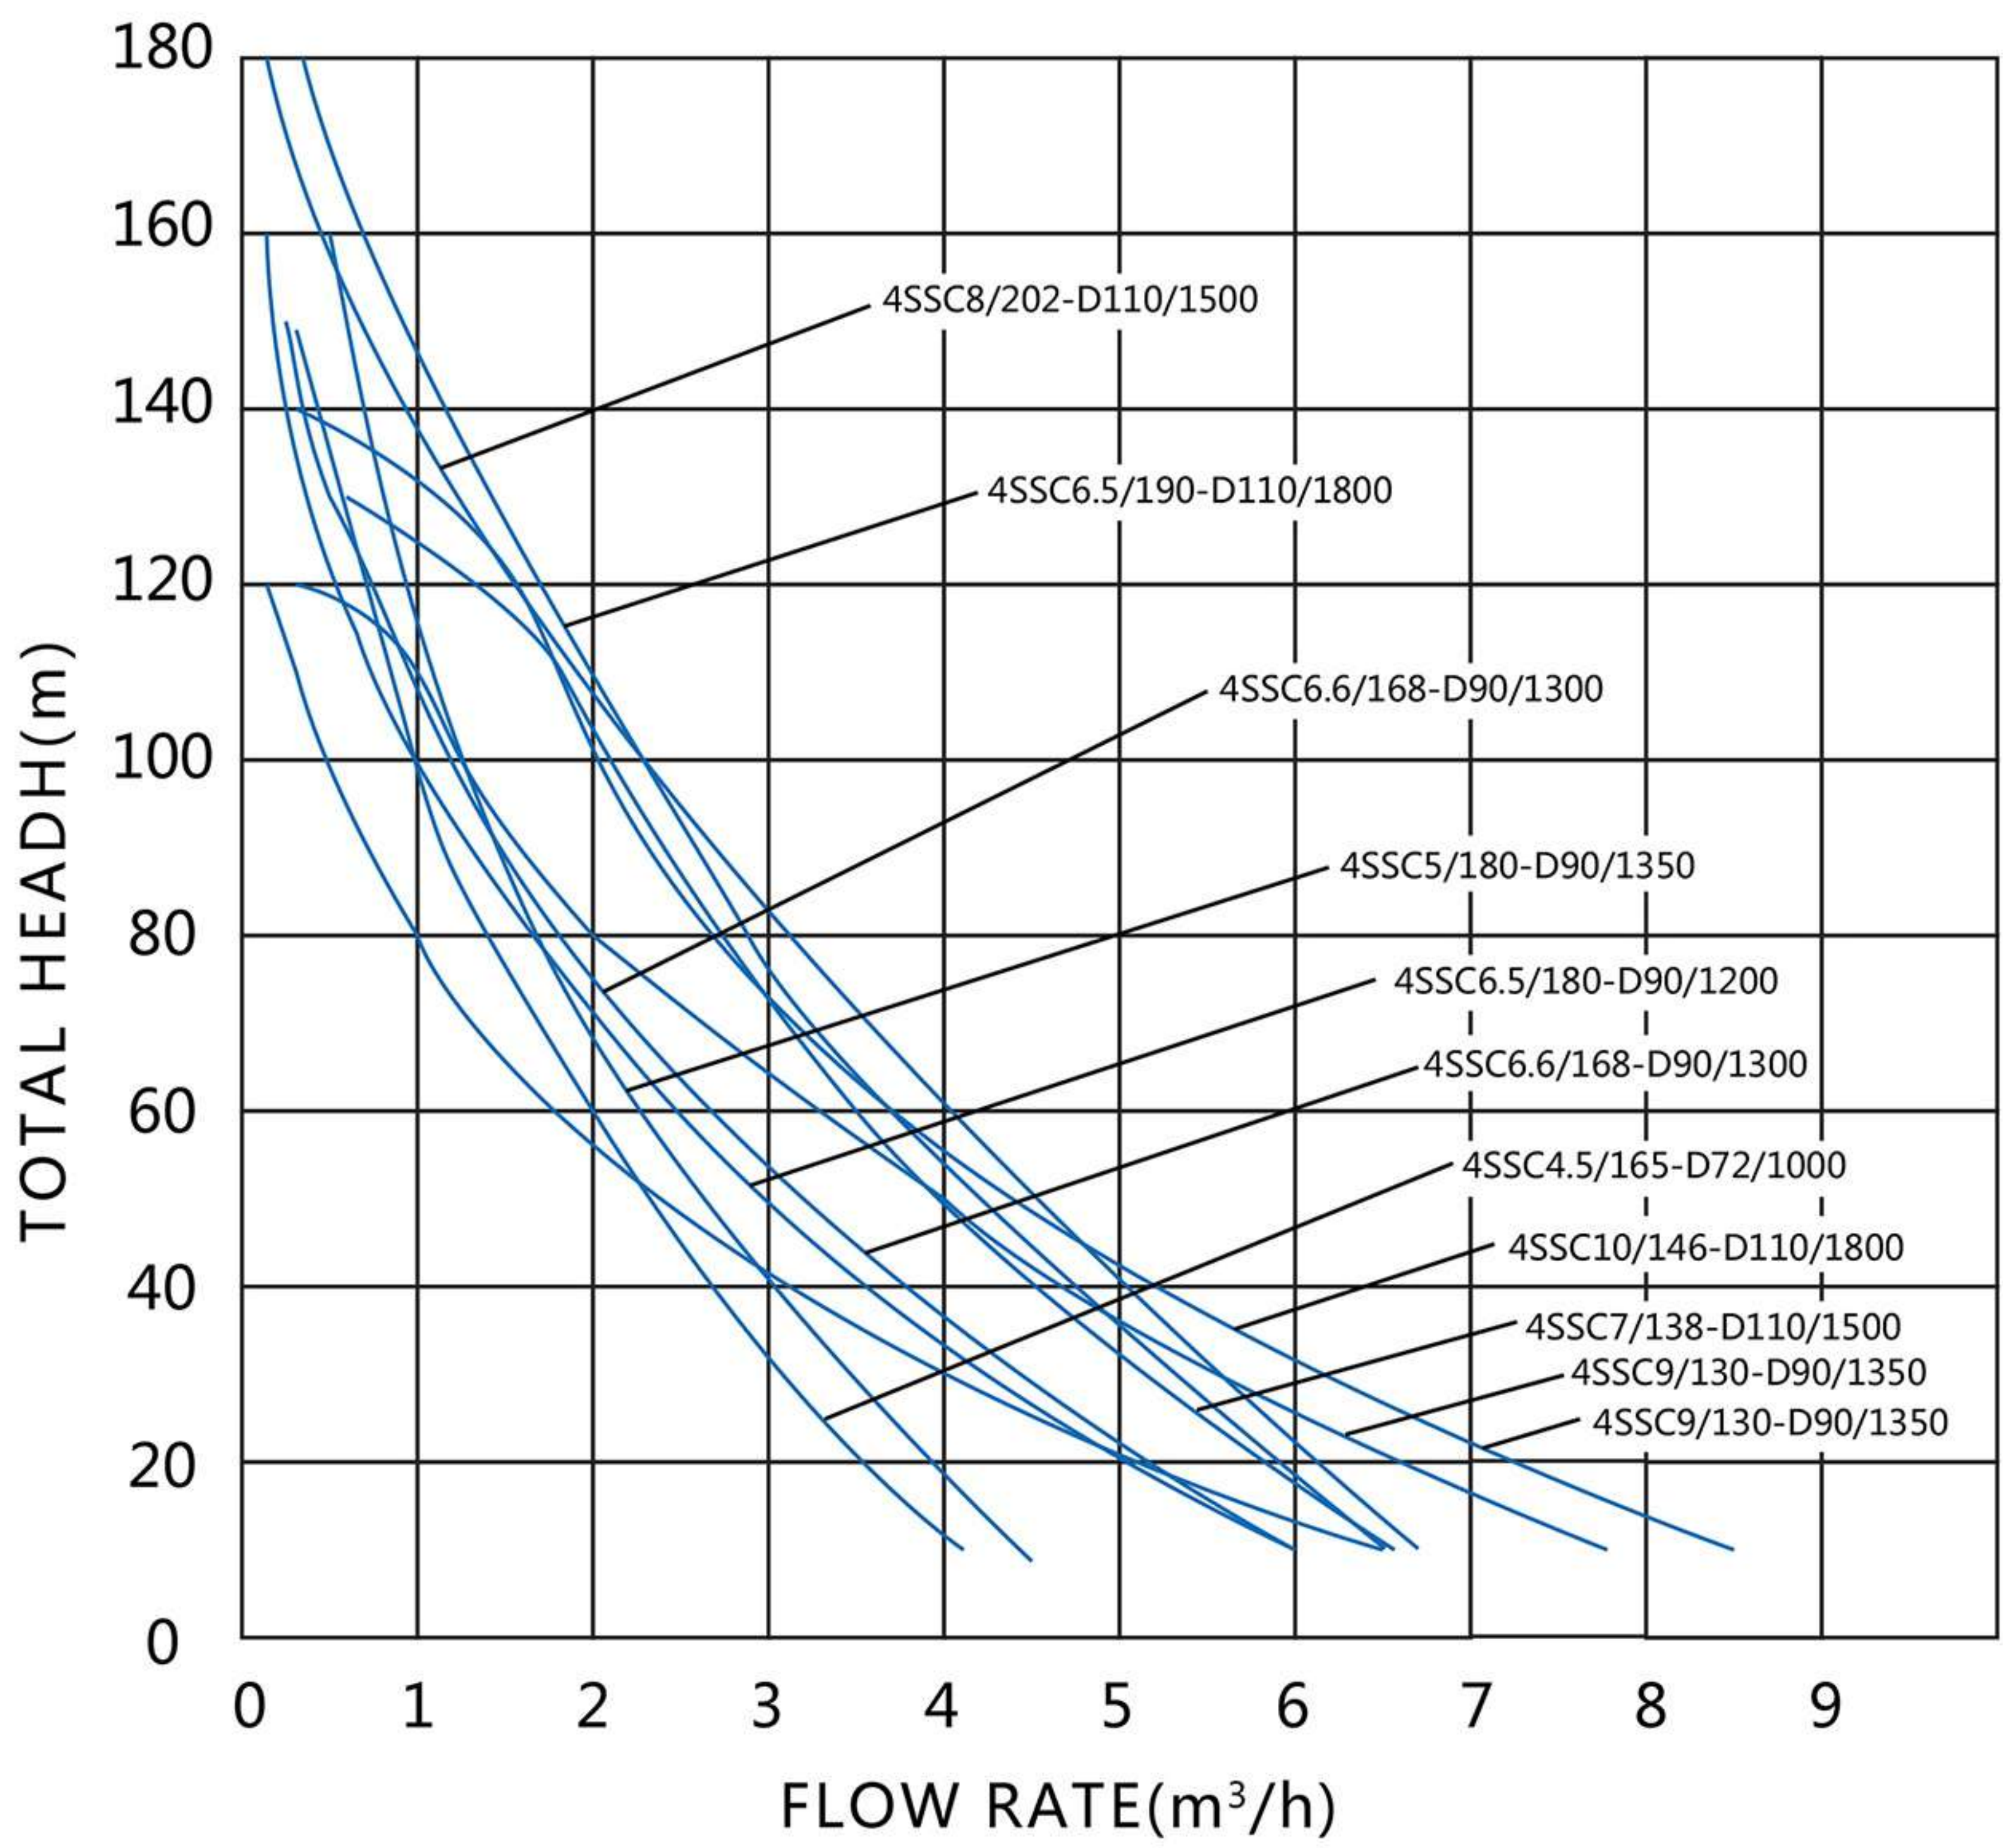

Performance Chart 流量扬程参数

MODEL 型号	HEAD 扬程 Mtrs.	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	180	200
4SSC8/125-D72/1200	FLOW 流量 m³/hr	6.54	5.37	4.05	2.98	2.25	1.79	1.37	1	0.71	0.42	0.3	0.27						
4SSC9/130-D90/1350		7.86	7.08	5.92	4.78	3.59	2.85	2.29	2.06	1.84	1.79	1.07	0.34	0					
4SSC7/138-D110/1500		6.56	6.24	5.62	5.01	4.39	3.6	3.07	2.61	2.5	2.2	1.81	1.18	0.56	0				
4SSC10/146-D110/1800		8.48	7.8	6.82	5.83	4.69	3.78	3.06	2.52	2.18	1.93	1.8	1.6	1.21	0.44				
4SSC4.5/165-D72/1000		4.15	3.81	3.41	2.9	2.41	1.98	1.68	1.41	1.14	0.96	0.79	0.64	0.63	0.55	0.4			
4SSC6.6/168-D90/1300		6.07	5.55	4.79	4.05	3.28	2.66	2.13	1.81	1.51	1.22	0.97	0.74	0.52	0.35	0.32			
4SSC6.5/180-D90/1200		5.96	5.39	4.71	3.98	3.21	2.64	2.22	1.85	1.53	1.28	1.03	0.81	0.69	0.52	0.39	0.17	0	
4SSC5/180-D90/1350		4.55	4.38	3.99	3.56	3.11	2.6	2.18	1.87	1.61	1.37	1.26	1.09	1	0.9	0.8	0.62	0	
4SSC6.5/190-D110/1800		6.11	5.91	5.63	4.51	4.15	3.66	3.19	2.79	2.41	2.13	2.04	1.78	0.97	0.96	0.8	0.7	0.39	
4SSC8/202-D110/1500		6.64	6.08	5.32	4.67	3.88	3.18	2.64	2.27	1.97	1.72	1.51	1.26	1.04	0.88	0.66	0.44	0.18	0

Technical Details 水泵技术参数

MODEL 型号	POWER 功率		Voltage 电压	Voltage Range 电压范围	Max Flow 最大流量	Max Head 最大扬程	Outlet 出水口	Outline 外径
4SSC8/125-D72/1200	1200 W	1.6 HP	72 VDC	30~100 VDC	8 m³/hr	125 Mtrs.	1.5 inch	4 inch
4SSC9/130-D90/1350	1350 W	1.8 HP	90 VDC	30~132 VDC	9 m³/hr	130 Mtrs.	1.5 inch	4 inch
4SSC7/138-D110/1500	1500 W	2.0 HP	110 VDC	30~140 VDC	7 m³/hr	138 Mtrs.	1.25 inch	4 inch
4SSC10/146-D110/1800	1800 W	2.5 HP	110 VDC	30~140 VDC	10 m³/hr	146 Mtrs.	1.5 inch	4 inch
4SSC4.5/165-D72/1000	1000 W	1.3 HP	72 VDC	30~100 VDC	4.5 m³/hr	165 Mtrs.	1.25 inch	4 inch
4SSC6.6/168-D90/1300	1300 W	1.7 HP	90 VDC	30~132 VDC	6.6 m³/hr	168 Mtrs.	1.5 inch	4 inch
4SSC6.5/180-D90/1200	1200 W	1.6 HP	90 VDC	30~132 VDC	6.5 m³/hr	180 Mtrs.	1.25 inch	4 inch
4SSC5/180-D90/1350	1350 W	1.8 HP	90 VDC	30~132 VDC	5 m³/hr	180 Mtrs.	1.25 inch	4 inch
4SSC6.5/190-D110/1800	1800 W	2.4 HP	110 VDC	30~140 VDC	6.5 m³/hr	190 Mtrs.	1.25 inch	4 inch
4SSC8/202-D110/1500	1500 W	2.0 HP	110 VDC	30~140 VDC	8 m³/hr	202 Mtrs.	1.5 inch	4 inch